


FILTER BERM

DRAPE FILTER FABRIC OVER BRUSH AND SECURE IN TRENCH (4"X4"MIN.) WITH COMPACTED NATIVE BACKFILL

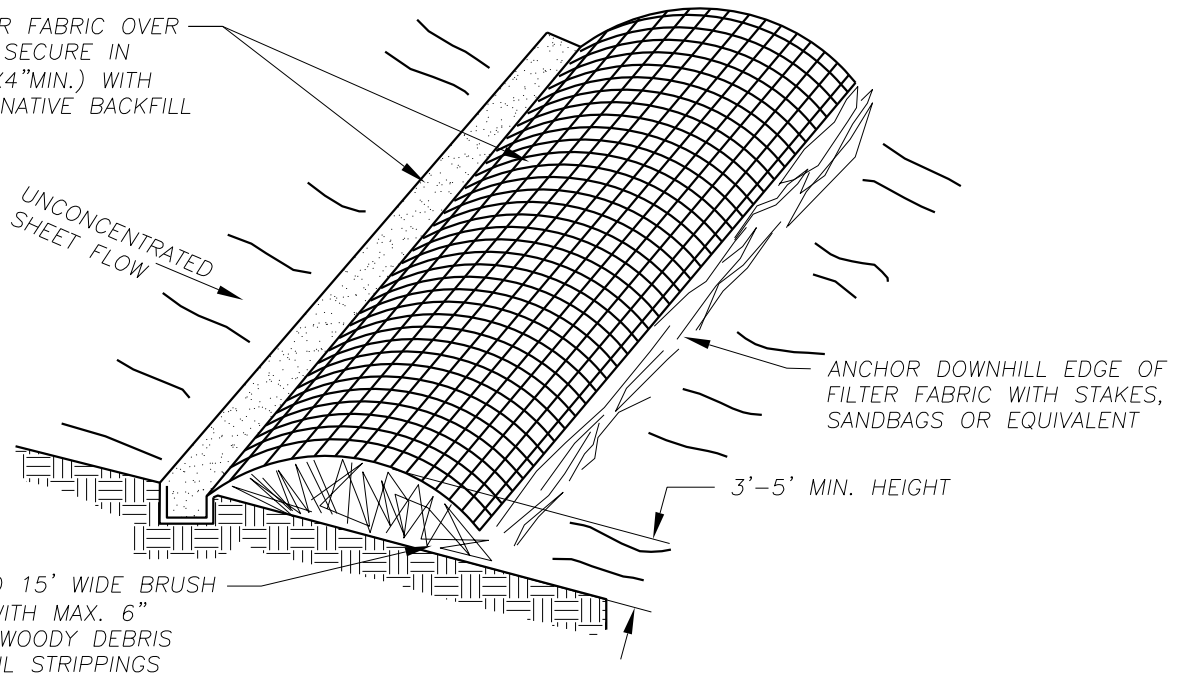

BRUSH BARRIER

NOTES:

1. DIRECT THE OUTLET SIDE OF THE ROCK FILTER BERM/DAMS ONTO A STABILIZED AREA, SUCH AS VEGETATION AND OR ROCK.
2. EMBED A MIN. OF 4" INTO THE EXISTING GROUND/EMBANKMENT.
3. USE 3:1 OR FLATTER SIDE SLOPES.
4. USED PRIMARILY AS A BASE MEASURE AT TOE OF SLOPE.

| NO. | REVISIONS | DATE | BY |
|-----|-----------|------|----|
|     |           |      |    |

DWG: E12.DWG



Department of  
Public Works  
**CLARK COUNTY**  
WASHINGTON  
proud past, promising future

*Peter Capen*  
COUNTY ENGINEER

FILTER BERM  
ROCK/BRUSH

APPROVED

5/23/08  
DATE

STANDARD

**E12**

DETAIL

DESIGNED  
DRAWN  
DATE 05/23/08