


CROSS SECTION
 DUAL-FACED CEMENT CONC. TRAFFIC CURB
TYPE 1
 (PREFERRED)

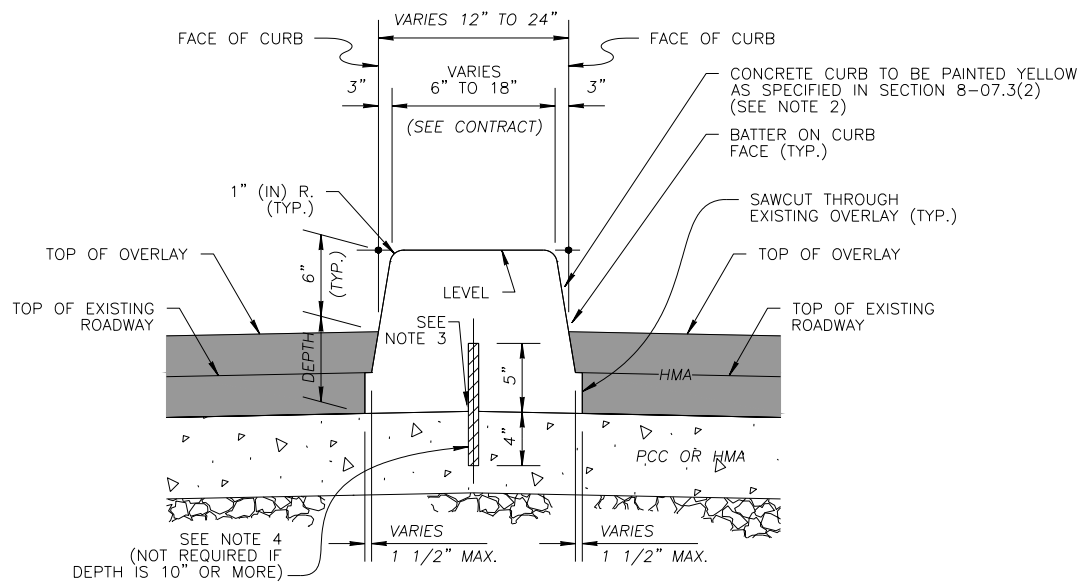

CROSS SECTION
 DUAL-FACED CEMENT CONC. TRAFFIC CURB
TYPE 2

NOTES:


1. CONCRETE CURB SHALL CONFORM TO SECTION 8-04.3(1) OF WSDOT STANDARD SPECIFICATIONS.
2. THE COLOR OF CURBING, RPM AND TUBULAR MARKER TO BE BASED UPON THE DIRECTION OF TRAFFIC FLOW PER THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
3. DRILL 3/4" (IN) DIAMETER HOLE IN THE PCC PAVEMENT.
4. RESIN BONDED ANCHORS (#4 STEEL REINFORCING BAR @ 18" (IN) O.C.), ONLY TO BE INSTALLED IN TYPICAL SLOPED NOSING WHEN A 2 INCH MINIMUM COVER CAN BE PROVIDED.

NO.	REVISIONS	DATE	BY

DWG: F19a.DWG



Department of
 Public Works
CLARK COUNTY
 WASHINGTON
 proud past, promising future

MEDIAN CURBING SHEET 1 OF 4 APPROVED  COUNTY ENGINEER		STANDARD F19a DETAIL DESIGNED DRAWN DATE 10/03/16
09/20/16 DATE		