

Recommendation - Extend jersey barrier to direct traffic into staff parking area

Stripe for No Parking


Install and anchor wheels stops - Paint stops yellow

ADA Parking & Access Aisle

Disabled parking signs at head of stalls
Two stalls and one access aisle each 96" wide measured from center of line

Pour asphalt pathway to intersect with existing pathway - 60" wide

Sign indicating location of accessible entrance on North side of building

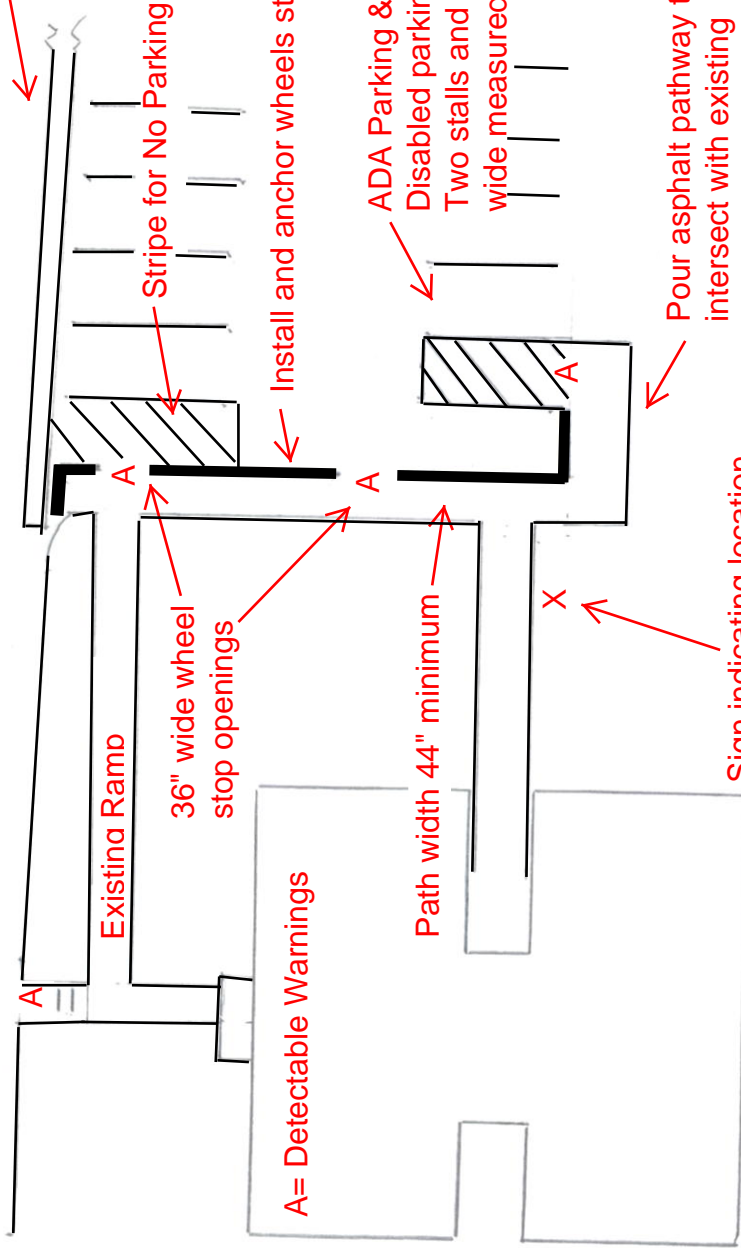

A = Detectable Warnings

Existing Ramp

36" wide wheel stop openings

Path width 44" minimum

X